




SENTRIGARD

METAL SYSTEMS


FLUSH PANEL

SOFFIT, MANSARD, AND WALL APPLICATIONS



FP100R 1" INTERLOCKING FLUSH PANEL

- > Flush panel with 1-inch wide reveal. Adds depth, texture and additional strength to the panel profile.
- > Architectural wall/soffit panel with reveal.

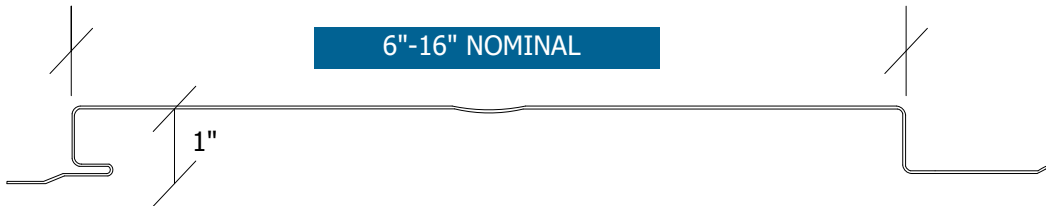

PANEL PERFORMANCE

PANEL TESTING COMING Q4 2025

FEATURES:

- > Vertical or horizontal application
- > Solid substrate or open framing
- > Concealed fastener attachment – no clip required
- > 35 year finish warranty on Kynar 500 finish
- > Weather tight warranty not available
- > Underlayment not required
- > Vented or non-vented
- > Available in 6"-16" panel widths

MATERIALS:

- > 24 and 26 gauge* Galvalume®
- > .032" aluminum

TESTING:

Sentrigard™ panel assemblies have passed extensive testing to ensure optimal performance in a wide range of conditions. This includes the rigorous High Velocity Hurricane Zone (HVHZ) performance criteria that tests for both wind uplift and air and water infiltration.

TEST REPORT SUMMARY:

- > > Florida Building Code 2023
- > PENDING: Testing per TAS 125-03 Std. Requirements for Metal Roof Systems
- > PENDING: Testing per TAS 100 Wind Driven Rain Test
- > PENDING: Test Assembly #6 by Underwriters Laboratory for:
 - > a) UL 580-94, per FBC, Uplift Resistance of Roof Assemblies
 - > b) UL 1897-98, per FBC, Uplift Tests for Roof Covering Systems
- > Class 4 Impact: UL2218
- > Class A fire: UL790