



SENTRIGARD

METAL SYSTEMS

FEATURES



- › Horizontal and vertical concealed fastener wall panel system
- › Multiple AWS panels can be integrated to create a varied wall assembly appearance
- › Can be installed in vertical assembly
- › Available with mitered corners that allow sweeping wall expanses
- › Can be installed with or without clips
- › Min. 16 ga. Secondary Framing: Maximum – 4' on-center
- › Field Curving: Minimum radius 200'
- › Panel Length: Maximum – 40' with Clip Attachment (Longer panel lengths available upon request)

MATERIALS

- › 22, 24 and 26 gauge Galvalume®
- › .032" and .040" aluminum

ARCHITECTURAL WALL SYSTEMS

HORIZONTAL AND VERTICAL APPLICATIONS

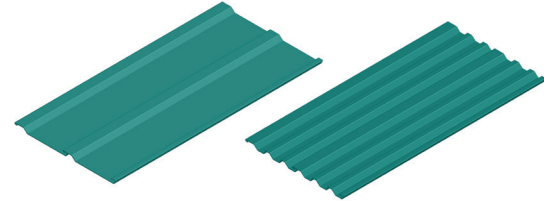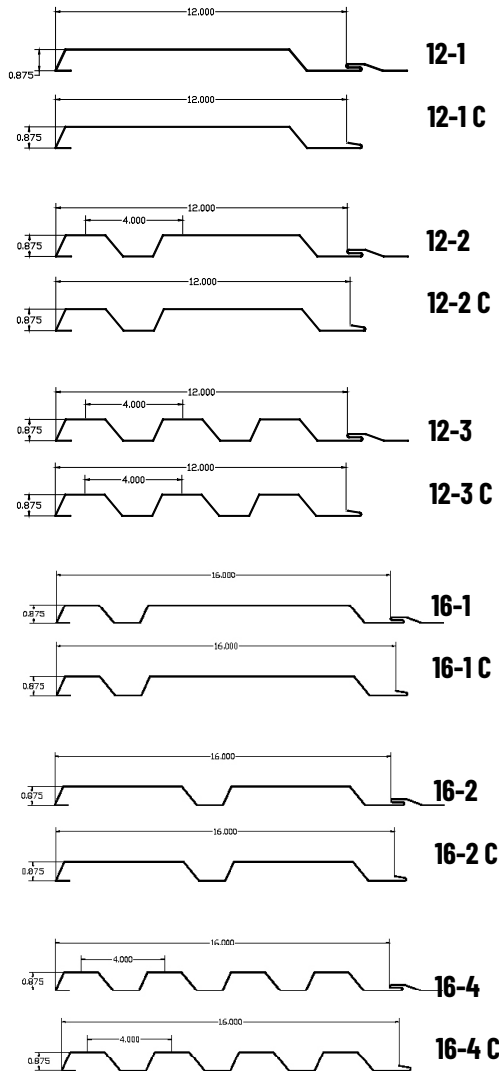

AWS PANELS

Architectural Wall Systems provide a horizontal or vertical concealed fastener wall panel system in multiple different profiles to suit many applications. Profiles feature concealed fasteners and can be installed with or without clips to allow for expansion and contraction of the panel system.

- › Air Infiltration: ASTM E283 0.005 CFM/SF @ 20 psf
- › Water Penetration: ASTM E331 No water leakage @ 25 psf
- › Structural Performance: ASTM E330 24 ga steel – Maximum load- 112.3 psf
- › 032" alum. – Maximum load- 61.6 psf
- › Dynamic Water Test: AAMA 501.1 No water leakage at 15 psf

